

## item number / EOL.CE.DLAL.11/13/15

AlaatreedAL, round LED plane downlight with anti-glare flat frame, opal diffuser, dimmable LED Driver & flex and plug. Fully dimmable with Dimmer.

### Application

residential or commercial indoor space

### Design Specifications

#### Recessed LED Downlight

11.13.15 watt, SMD technology, 90 lumens per watt

input:220-240v , frequency:50/60Hz

50,000 hours

PF 0.9, 3 CCT changeable colour temperature

CRI:80a , beam angle 120 deg

Dimmable constant current power supply driver with most

Universal and trailing edge dimmers

Flicker free- eyes protection

90mm cutout, Flex and plug



### Performance


Dimmable – dimmable Trailing edge

- 120°**
- IP44**
- CRI >80**
- PF >0.9**
- TRI Colour**
- DIM**
- 3 years WARRANTEE**

### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle
<b>EOL.CE.DLAI.11</b>	11w. dimmable downlight	220-240VAC	11	90lm /w	Tri-colour	120
<b>EOL.CE.DLAI.13</b>	11w. dimmable downlight	220-240VAC	13	90lm /w	Tri-colour	120
<b>EOL.CE.DLAL.15</b>	15w. dimmable downlight	220-240VAC	15	90lm /w	Tri-colour	120
<b>CRI</b>		<b>COLOUR BODY</b>		<b>box Dimension</b>		
80+		White & BLACK		140*115*90MM		

Dimensions

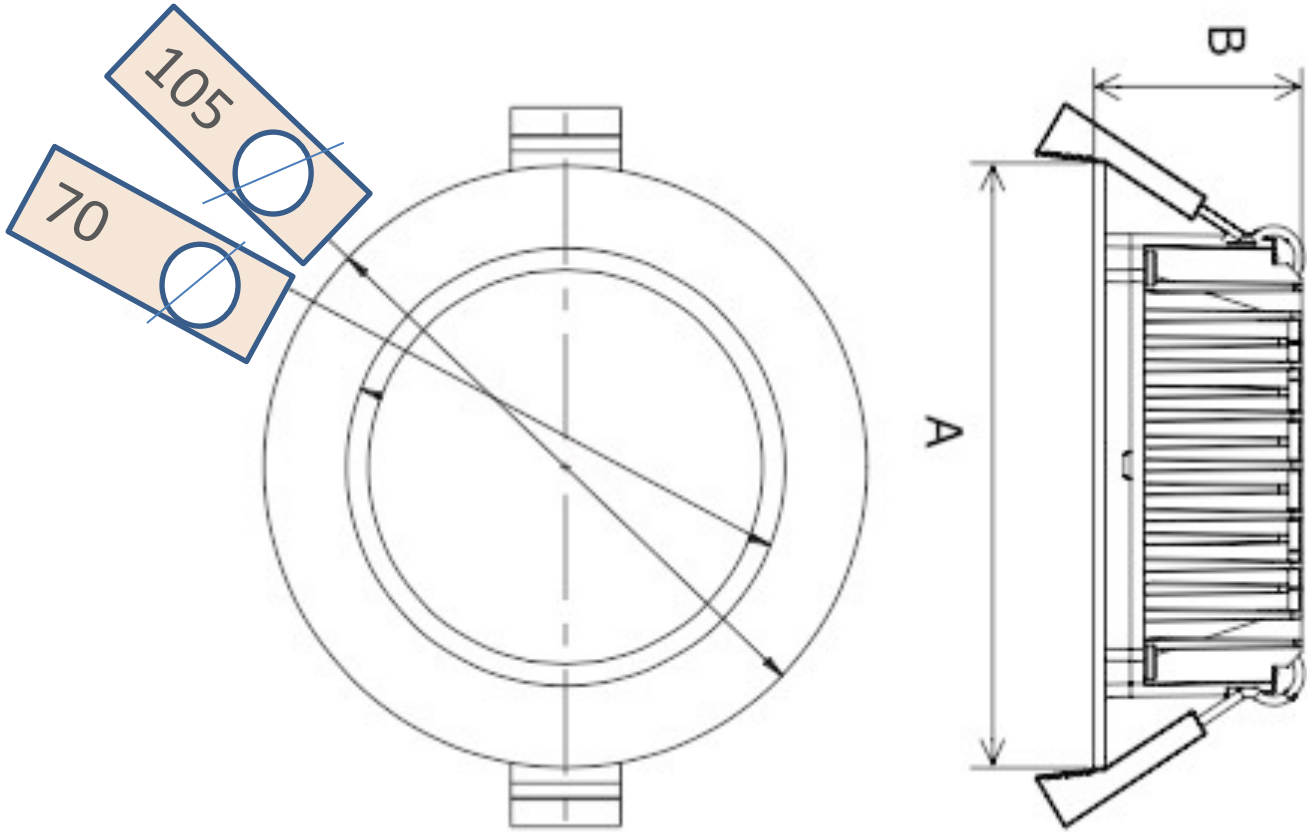

Body size

A: 105mm

B: 40mm

Cutout

90-95mm