

item number / EOL.DL20-15

15W recessed dimmable downlight

Application

residential or commercial indoor space

Design Specifications

Recessed LED dimmable downlight with 3cct selectable colour temperature.

15w white, beam angle 120 , 3CCT , material Die cast aluminium ,IP20, operation temp -20C-+50C, CRI 80, safety class II , input AC220-240v , frequency 50/60Hz ; SMD2835 LEDs ,PF 0.9, 110lm/w, cut-out 110mm. Selectable colour temperature with an integral DIP switch 3000K / 4000K /6500K
Designed with flex in plug for easy installation



Flex and plug

Performance


Dimmable – yes

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle
EOL.DL20-15	15w led downlight ,	220-240	15	1770	3 cct	120
CRI		COLOUR BODY			box Dimension	
80+		White			150* 150* 70mm	

Dimensions

► | **Trim Colour:** White/

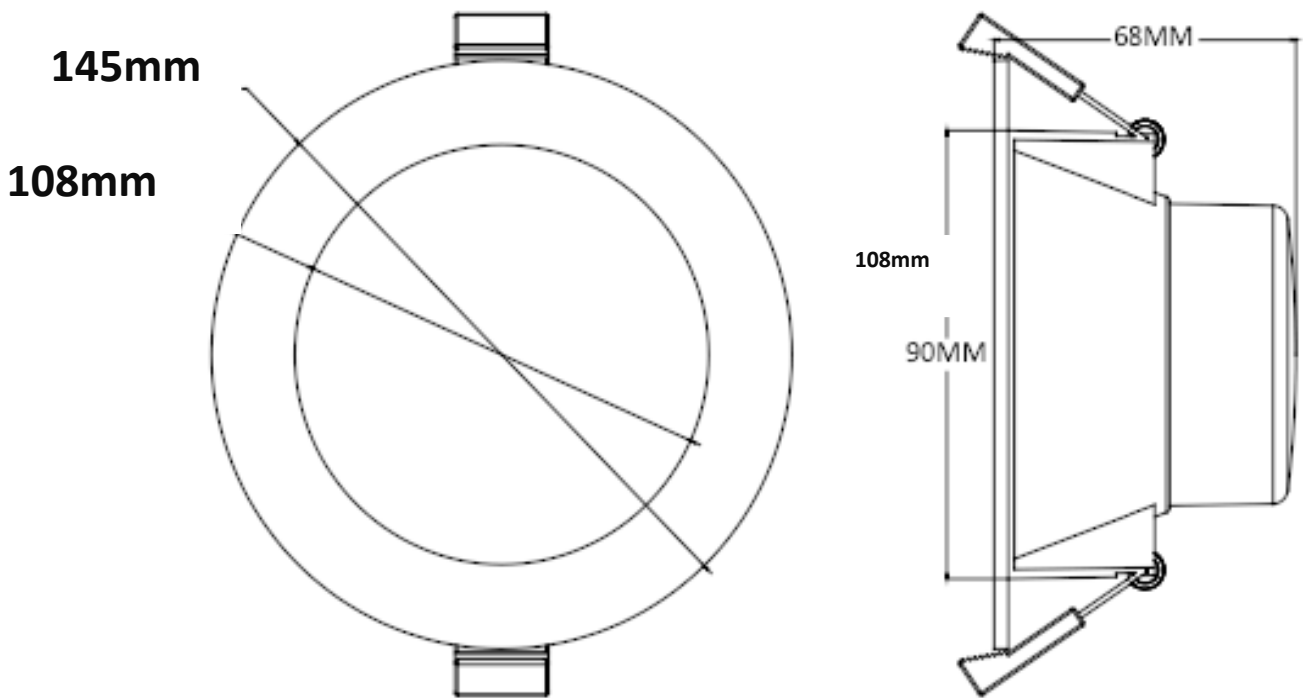

► | **Size & Power & Lumen & Size & Cutout**

(Inch)			(AxBmm)	(mm)
120mm.	15w.	1770.	120*80	108